

Dialight

“LED BASED” DUAL RED / WHITE MEDIUM INTENSITY BEACON



ICAO (Annex 14, July 1999) *Pending ETL Certification*

FEATURES / BENEFITS

- ▲ 20,000 cd nominal daytime white and 2,000 nighttime red
- ▲ Designed to replace Dual Xenon Strobe units, FAA type L865/L864 ICAO Medium Intensity Type A/B
- ▲ Resistant to shock and vibration
- ▲ Universal 110/240 VAC input 50/60Hz
- ▲ Innovative Temperature Management System (TMS) to ensure longevity of LEDs
- ▲ Can be controlled and monitored by Dialight approved, industry accepted, obstruction lighting system manufacturers
- ▲ Capable of multiple intensity settings
- ▲ Eliminates high voltage parts and issues associated with traditional strobes
- ▲ Dramatically reduces cable sizing requirements
- ▲ Meets or exceeds industry EMI/RFI standards

APPLICATION

▲ The Dialight dual beacon is the first production medium intensity Red/White beacon, utilizing state of the art optics. With the use of a simple controller(controller not supplied), the beacon will provide over 20,000 cd in the daytime mode and 2,000 red in the night time mode. In the event of a problem with the nighttime mode red, the light will default to 2,000 cd white night time operation. Its advanced passive temperature management system maintains the LEDs well within their temperature tolerance in all operating conditions. The beacon has a microprocessor controlled driver and a default flash mode if it loses communication with the controller.

SPECIFICATIONS

- ▲ **Operating Voltage** : 110 - 240 VAC \pm 10%, 50 - 60 Hz
- ▲ **Power Consumption** : 300W Continuous @ 40 fpm (Daytime), 60W Continuous @40 fpm (Nighttime)
- ▲ **Lightsource** : LEDs > 7-10 year life expectancy
- ▲ **Effective Intensity** : 20,000 cd white \pm 25% in daytime mode, 2,000 cd red \pm 25% in nighttime mode
- ▲ **Operating Temperature** = -40°C to +55°C
- ▲ **Storage Temperature** = -55°C to +55°C
- ▲ **Lighting Protection** : 6KV 3000 amps combination wave
- ▲ **Flash Rate** : 20 - 40 fpm (controller dependent)
- ▲ **Synchronization** : 2 unit sync from single controller
(Operates with other manufacturers of GPS sync devices)

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Europe Ltd.

Exning Road, Newmarket, England, CB8 0AX
Tel: +44 (0) 1638 666541 • Fax: +44 (0) 1638 561735
www.dialight-obstruction-lights.com



A Subsidiary of Dialight PLC




Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778
www.dialight.com



MDTFD265X001_B

MECHANICAL DIMENSIONS

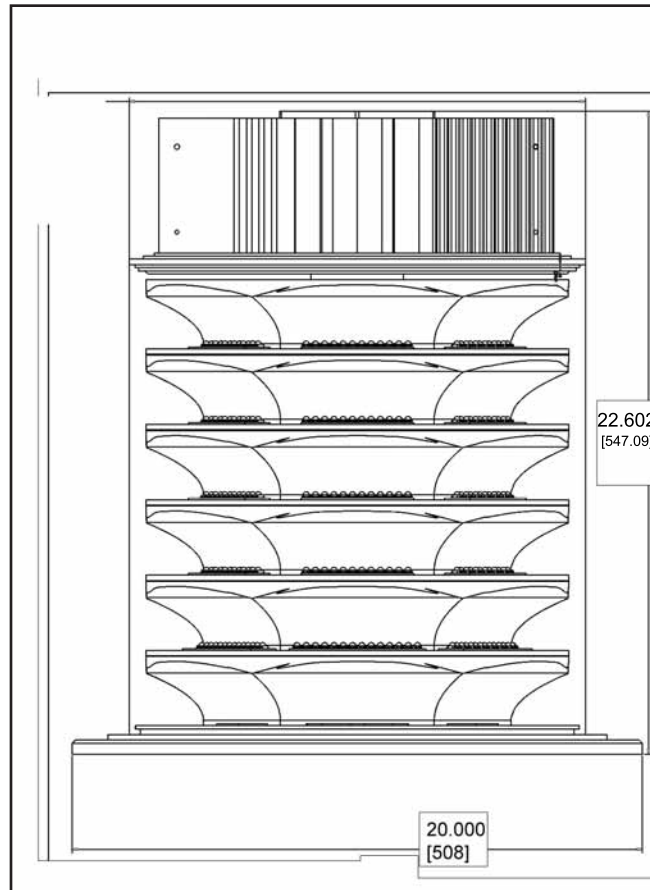

Dimensions in Inches [mm]

ORDERING INFORMATION

Product	Description
D8RW-C13-006	Dual Beacon 20,000cd daytime white, 2,000cd nighttime red

Dialight reserves the right to make changes at any time in order to supply the best product possible.

Dialight Europe Ltd.

Exning Road, Newmarket, England, CB8 0AX

Tel: +44 (0) 1638 666541 • Fax: +44 (0) 1638 561735

www.dialight-obstruction-lights.com



A Subsidiary of Dialight PLC



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778

www.dialight.com



MDTFD265X001_B